
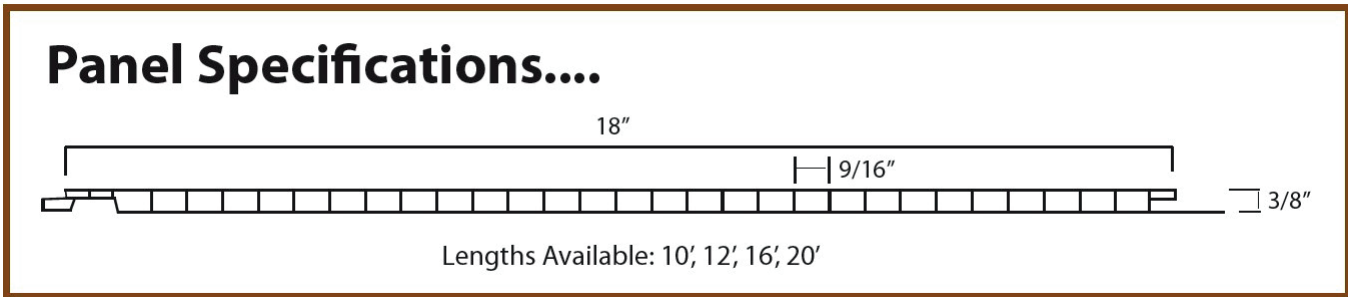


Interlocking PVC wall and ceiling panels distributed by Versa Built Inc. provide a smooth, bright white finish to any interior project. The tongue and groove design provides for quick and easy installation and no exposed fasteners for a clean, smooth finished look.

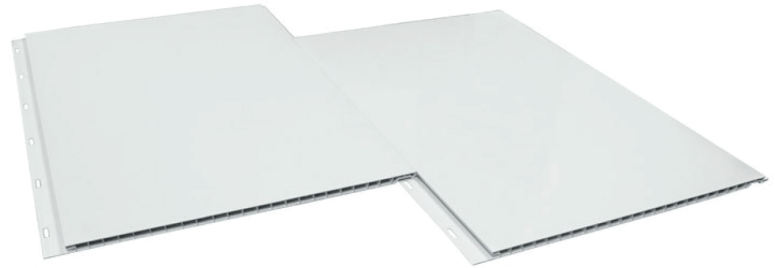


Advantages

- Easy Install, hidden fasteners
- 3/8" thick panel
- Class A Fire Rating
- Corrosion Resistant
- Easy to clean

Common Uses

- Car washes
- Food Processing Plants
- Meat Packing Facilities
- Breweries
- Hog/Poultry/Dairy Barns
- Refrigerated Warehouses
- Workshops
- Kennels

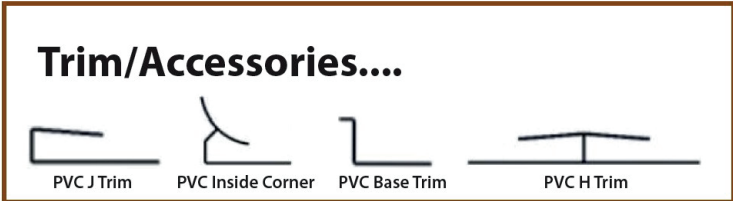

Property	Test Method	Values
Weight	n/a	0.74 psf (3.62 kg/m ²)
Tensile Strength	ASTM D638-10	4960 psi (34.2 MPa)
Tensile Modulus	ASTM D638-10	416,258 psi (2870 MPa)
Flexural Strength	ASTM D790-10 Procedure A	9964 psi (68.7 MPa)
Flexural Modulus	ASTM D790-10 Procedure A	400,304 psi (2760 MPa)
Izod Notched Impact (23C)	ASTM D256-10 Method A	2.19 ft-lb/in of notch (117 J/m)
Shore D Hardness	ASTM D2240-05 (2010)	D/80/1
Heat Deflection Temperature	ASTM D648-07 Method B	155.12 F (68.4 C)
Specific Gravity	ASTM D792-13 Method B	1.490
Flame Spread	ASTM E84-15	10 (Class A)
Smoke Developed	ASTM E84-15	400 (Class A)

All trim is supplied in easy to handle 12' long pieces.